


SWITCHES

Indicator Lights & Emergency Stop Buttons

FEATURES

INDICATOR LIGHTS

- Terminals are tin-plated brass.
- Dome style.
- Wire leads are 22 AWG, 4.4-4.8" long, 1/2" stripped.
- Mounting will snap-fit into 0.500-0.505" diameter hole in 0.020-0.100" thick panels.

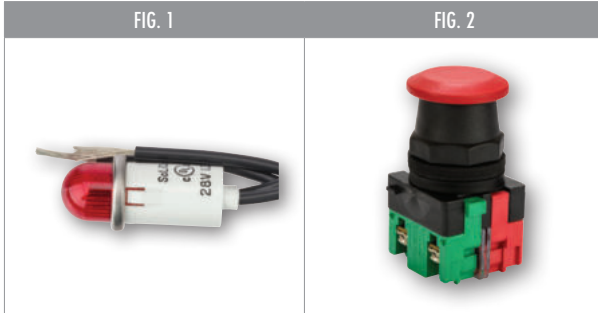

CAT. NO.	FIG. NO.	NAED NO.	LENS COLOR	COLOR	LENS MATERIAL	VOLTAGE (VAC)	BULB TYPE	BAG QTY.	STD. CTN. QTY.
79900LW	1	—	—	Red	Polycarbonate	28V	Incandescent	1	12
79901LW	1	—	—	Green	Polycarbonate	28V	Incandescent	1	12
79902LW	1	—	—	Amber	Polycarbonate	28V	Incandescent	1	12
79910LW	1	—	—	Red	Nylon	105-125VAC	Neon	1	12
79911LW	1	—	—	Green	Polycarbonate	105-125VAC	Neon	1	12
79912LW	1	—	—	Amber	Nylon	105-125VAC	Neon	1	12
79920LW	1	—	—	Red	Polycarbonate	208-250 VAC	Neon	1	12
79921LW	1	—	—	Green	Polycarbonate	208-250 VAC	Neon	1	12
79922LW	1	—	—	Amber	Polycarbonate	208-250 VAC	Neon	1	12
Dimensions (IN)	1	L: 1.300	W: 0.489						
ESB2-INCR (UL Listed)	2	32132	Red	—	—	—	—	—	6
ESB2-INOINC-R (UL Listed)	2	32136	Red	—	—	—	—	—	6