

# GROUNDING

## Ground Clamps

### Heavy Duty & with 360° Adapters for Rigid Conduit G Series



#### SPECIFICATIONS

##### Heavy Duty Bronze (G)

- UL467 Listed, Grounding & Bonding.

##### For Rigid Conduit (G)

- UL467 Listed, Grounding & Bonding.
- CSA.


#### FEATURES

##### Heavy Duty Bronze (G)

- Heavy duty bronze adapters have serrations that match the serrations on the ground clamp, assuring positive lock.
- All adapters fit all clamps for the ultimate flexibility.
- Assembled with zinc plated steel hardware.
- Used to connect grounding conductor to rigid conduit on water pipe.

##### For Rigid Conduit (G)

- Used to connect grounding conductor to rigid conduit on water pipe.

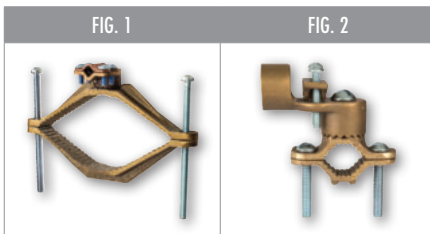

CAT. NO.	FIG. NO.	CERTIFICATION	PIPE SIZE (IPS) (IN.)	CONDUIT HUB SIZE (IN.)	GROUND WIRE RANGE (IN.)	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	STD. CTN. QTY.
G-3	1	UL	1 1/2-1	—	8-4/0 STR	2.320	0.748	1.437	20
G-4	1	UL	1 1/4-2	—	8-4/0 STR	3.528	0.850	2.706	10
G-15	1	UL	2 1/2-4	—	8-4/0 STR	6.125	0.964	3.962	6
G-16	1	cULus	4 1/2-6	—	8-4/0 STR	7.916	0.933	4.565	3
G-5	2	cULus	1/2 - 1	1/2	10 SOL - 2/0 STR	2.200	0.748	2.437	15
G-6	2	cULus	1 1/4 - 2	1/2	10 SOL - 2/0 STR	3.667	0.791	3.195	10
G-7	2	UL	1/2 - 1	3/4	10 SOL - 3/0 STR	2.200	0.748	1.437	15
G-8	2	UL	1 1/4 - 2	3/4	10 SOL - 3/0 STR	3.616	0.791	3.298	8
G-9	2	cULus	1/2 - 1	1	10 SOL - 3/0 STR	2.315	0.747	3.159	12
G-10	2	UL	1 1/4 - 2	1	10 SOL - 3/0 STR	3.616	0.816	3.561	8
G-18	2	UL	2 1/2 - 4	1/2	10 SOL - 2/0 STR	6.125	0.961	4.812	6
G-19	2	cULus	4 1/2 - 6	1/2	10 SOL - 2/0 STR	8.125	1.263	4.740	3
G-21	2	cULus	2 1/2 - 4	3/4	10 SOL - 3/0 STR	6.125	0.961	4.943	6
G-22	2	UL	4 1/2 - 6	3/4	10 SOL - 3/0 STR	8.227	1.244	5.050	3
G-24	2	cULus	2 1/2 - 4	1	10 SOL - 3/0 STR	6.125	0.940	5.191	6
G-25	2	UL	4 1/2 - 6	1	10 SOL - 3/0 STR	8.225	1.260	5.245	3

GROUNDING

Scan QR code  
for mobile access to  
Grounding drawings.

