

# GROUNDING


## Grounding Connectors

### Isolated Ground Bars

GBA, GBC Series

#### FEATURES

- Made from either high-strength aluminum alloy 6061-T6 or high-conductivity copper as indicated below.
- The base is made from high-strength glass-filled polyester.
- Aluminum connectors are dual-rated for use with aluminum or copper cables.

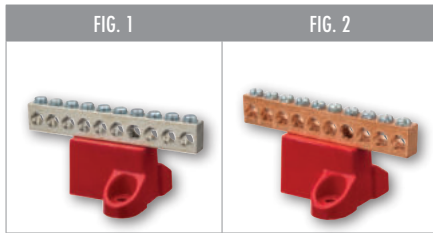

CAT. NO.	FIG. NO.	MATERIAL	WIRE RANGE	NO. OF CIRCUITS	LENGTH (L) (IN.)	HEIGHT (H) (IN.)	WIDTH (W) (IN.)	STD. CTN. QTY.
GBA2-7	1	Aluminum	AL/CU 2 - 14	7	2.88	2.31	1.88	3
GBC2-7	2	Copper	CU 2 - 14	7	2.88	2.31	1.75	3
GBA2-10	1	Aluminum	AL/CU 2 - 14	10	4.07	2.31	1.88	3
GBC2-10	2	Copper	CU 2 - 14	10	4.07	2.31	1.75	3
GBA2-14	1	Aluminum	AL/CU 2 - 14	14	5.56	2.31	1.88	2
GBC2-14	2	Copper	CU 2 - 14	14	5.56	2.31	1.75	2
GBA2-20	1	Aluminum	AL/CU 2 - 14	20	8.04	2.31	1.88	2
GBC2-20	2	Copper	CU 2 - 14	20	8.04	2.31	1.75	2
GBA20-7	1	Aluminum	AL/CU 2/0 - 14	7	4.61	2.31	2.13	3
GBA20-10	1	Aluminum	AL/CU 2/0 - 14	10	6.41	2.31	2.13	3
GBA20-14	1	Aluminum	CL/CU 2/0 - 14	14	8.81	2.31	2.13	2



Scan QR code  
for mobile access to  
Grounding drawings.