

GROUNDING

Grounding Connectors

Heavy Duty for Parallel, 90° Copper Cable
UC Series




SPECIFICATIONS

- UL467 Listed, Grounding & Bonding.

FEATURES

- Made of high-copper-content alloy for grounding to
- 1/2" - 1" ground rods and ground pipes from
- 1/4" - 3 1/2" in parallel or 90° position.
- Suitable for direct burial in earth and concrete.
- Nuts and lockwashers are silicon bronze.
- For use with single wire.

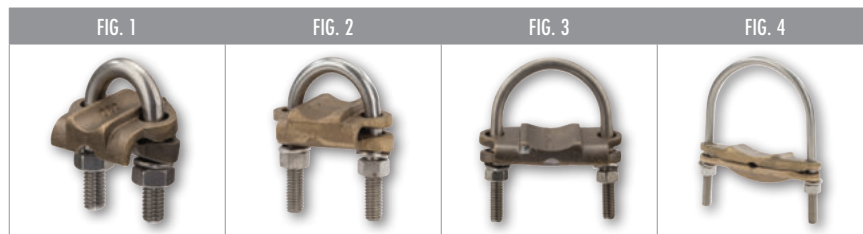

CAT. NO.	FIG. NO.	CERTIFICATION	PIPE SIZE (IPS) (IN.)	ROD SIZE (IN.)	CABLE RANGE (IN.)	STD. CTN. QTY.
UC-101	1	UL	1/4	1/2	2/0 - 4	12
UC-102	1	Not UL Listed	1/4	1/2	250-2/0	12
UC-103	1	UL	3/8	5/8 - 3/4	4 - 8	12
UC-104	1	UL	3/8	5/8 - 3/4	2/0 - 4	12
UC-105	1	UL	3/8	5/8 - 3/4	250 - 2/0	12
UC-108	1	UL	1/2 - 3/4	7/8 - 1	2/0 - 4	12
UC-109	1	UL	1/2 - 3/4	7/8 - 1	250 - 2/0	12
UC-110	1	Not UL Listed	1/2 - 3/4	7/8 - 1	300-500	12
UC-114	2	UL	1	-	2/0 - 4	6
UC-115	2	UL	1	-	250 - 2/0	12
UC-120	2	UL	1 1/4	-	2/0 - 4	12
UC-121	2	UL	1 1/4	-	250 - 2/0	12
UC-126	2	UL	1 1/2	-	2/0 - 4	12
UC-127	2	UL	1 1/2	-	250 - 2/0	12
UC-132	3	UL	2	-	2/0 - 4	12
UC-133	3	UL	2	-	250 - 2/0	6
UC-137	3	UL	2 1/2	-	2/0 - 4	6
UC-138	3	UL	2 1/2	-	250 - 2/0	6
UC-142	4	UL	3	-	2/0 - 4	6
UC-143	4	UL	3	-	250 - 2/0	6
UC-147	4	UL	3 1/2	-	2/0 - 4	3
UC-148	4	Not UL Listed	3 1/2	-	250 - 2/0	3

GROUNDING

Scan QR code
for mobile access to
Grounding drawings.

