



CABLE TIES

Natural & Weather Resistant Mountable Ties


-MH Series

SPECIFICATIONS

FEATURES

- Standard mountable cable ties are manufactured from natural Nylon 66 and come complete with a mounting hole.
- Black weather mountable cable ties are also screw mounted, are manufactured from Weather Resistant Nylon 66 and suitable for outdoor use.

- cULus Listed for Positioning Devices UL62275.
- **Temperature Rating:** Min., -40°F to Max., 185°F (-40°C to 85°C).
- **Ideal Storage:** 23°C, Humidity 50%, Avoid storing cable ties next to warm objects.
- **Type 21 AH-2:** "Suitable for use in air-handling spaces (Plenums)".

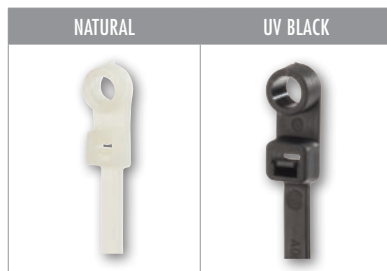

CAT. NO.	COLOR	MAX. WIRE/CABLE SIZE	MAX BUNDLE DIAMETER	TENSILE STRENGTH	LENGTH (IN.)	WIDTH (IN.)	STD. PKG. QTY.	STD. CTN. QTY.
530MH	Natural	5"	1.500	30 Lbs.	6.000	0.145	100	1,000
750MH	Natural	7"	2.250	50 Lbs.	8.000	0.165	100	1,000
1150MH	Natural	11"	3.250	50 Lbs.	11.750	0.188	100	1,000
1450MH	Natural	14"	4.000	50 Lbs.	14.500	0.188	100	500
14120MH	Natural	14"	4.750	120 Lbs.	15.500	0.310	100	500
5300MH	UV Black	5"	1.500	30 Lbs.	6.000	0.145	100	1,000
7500MH	UV Black	7"	2.000	50 Lbs.	8.000	0.165	100	1,000
11500MH	UV Black	11"	3.250	50 Lbs.	11.750	0.188	100	1,000
14500MH	UV Black	14"	4.000	50 Lbs.	14.500	0.188	100	500
141200MH	UV Black	14"	4.750	120 Lbs.	15.500	0.310	100	500