

# MECHANICAL

## 24 Hour In-Wall Time Switch

### 711A Series



#### SPECIFICATIONS


- Input Voltage: 125VAC
- Terminal Range: #14AWG.
- Operating Temperature: 32 °F to +104 °F (0 °C to +40 °C).

#### APPLICATIONS

- Porch or patio, doorway, pool.
- Outdoor security lighting.

#### FEATURES

- **Scheduling:** Minimum ON setting is 30 minutes. Dial has 48 captive trippers.
- **Bypass Switch:** Slide switch for ON, OFF, or TIMER (automatic) operation.
- **Vacation Mode:** Set timer OFF with no change of tripper settings.
- **Wiring:** Requires a neutral.
- **Clock Format:** AM/PM marked on dial.
- **Wall Plate:** Supplied with single gang wall plate.

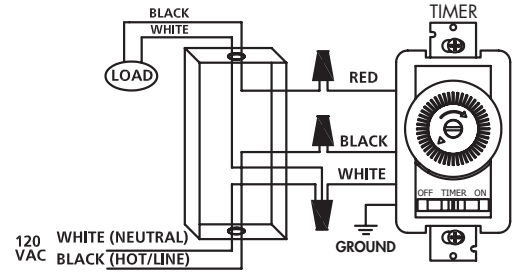

CAT. NO.	UPC CODE	INPUT SUPPLY (VAC) 60 Hz	COLOR	GENERAL PURPOSE	RATING		
					RESISTIVE	TUNGSTEN	MOTOR
711A	10114	125	White	15A	15A	1250W	1/2HP

# MECHANICAL

## 24 Hour In-Wall Time Switch

### 701B Series



#### SPECIFICATIONS


- Input Voltage: 125VAC, 60Hz
- Terminal Range: #14AWG.
- Operating Temperature: 32 °F to +104 °F (0 °C to +40 °C).

#### APPLICATIONS

- Porch or patio, interior lighting.
- Pool, entryway lighting.

#### FEATURES

- **Scheduling:** Minimum ON setting is 30 minutes. Dial has 48 captive trippers.
- **Flexible:** Removable dial allows installation in multi-gang boxes with decorator style wall plates.
- **Bypass Switch:** Slide switch for ON, OFF, or TIMER (automatic) operation.
- **Vacation Mode:** Set timer OFF with no change of tripper settings.
- **Wiring:** Requires a neutral.
- **Clock Format:** AM/PM marked on dial.
- **Wall Plate:** Supplied with single gang decorator wall plate.

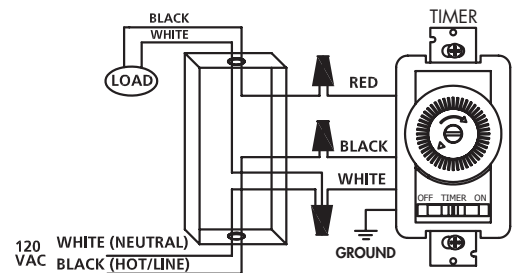

CAT. NO.	UPC CODE	INPUT SUPPLY (VAC) 60 Hz	COLOR	GENERAL PURPOSE	RESISTIVE	RATING		MOTOR
						TUNGSTEN	ELECTRONIC BALLAST (LED)	
701B	10121	125	White	20A	20A	1500W	500VA	1HP