




PANEL CHANNEL
Narrow Finger, High Density
Panel Channel
PC--LSN SERIES

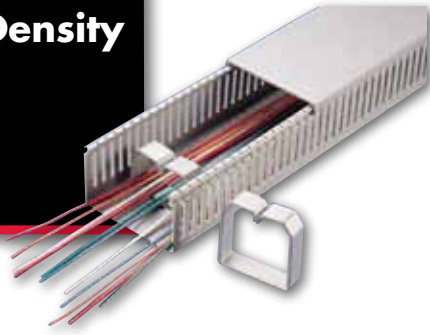


FEATURES

- Narrower finger width is 6mm.
- Slot width is 4mm.
- Made from high-impact, self-extinguishing, warp-proof PVC.
- Optional adhesive backing is available.
- Maximum service temperature: 85 °C (185 °F).
- Tested to UL File up to 50 °C (122 °F). 94V-0 rated.
- 5mm slot width is available in both white and grey for 1020, 2020, 2030, 2040


RATINGS



Mounting holes:
For widths up to 2.5"




For widths over 2.5"



CAT.
NO.

- PC.75.75-LSN**
- PC1010-LSN**
- PC1010-LSN-W**
- PC1015-LSN**
- PC1015-LSN-W**
- PC10175-LSN**
- PC10175-LSN-W**
- PC1020-LSN**
- PC1020-LSN-W**
- PC10250-LSN**
- PC1030-LSN**
- PC1030-LSN-W**
- PC1515-LSN**
- PC1520-LSN**
- PC1520-LSN-W**
- PC1530-LSN**
- PC1540-LSN**
- PC175175-LSN**
- PC2020-LSN**
- PC2020-LSN-W**
- PC2030-LSN**
- PC2030-LSN-W**
- PC2040-LSN**
- PC3020-LSN**
- PC3020-LSN-W**
- PC3030-LSN**
- PC3040-LSN**
- PC4020-LSN-W**
- PC4030-LSN**
- PC4040-LSN**



NOMINAL SIZE	COLOR	LENTH (FT.)	STD. PKG. QTY.	STD. CTN. QTY.
3/4 x 3/4	Grey	6'	6'	72'
1 x 1	Grey	6'	6'	72'
1 x 1	White	6'	6'	72'
1 x 1 1/2	Grey	6'	6'	72'
1 x 1 1/2	White	6'	6'	72'
1 x 1 3/4	Grey	6'	6'	72'
1 x 1 3/4	White	6'	6'	72'
1 x 2	Grey	6'	6'	72'
1 x 2	White	6'	6'	72'
1 x 2 1/2	Grey	6'	6'	72'
1 x 3	Grey	6'	6'	72'
1 x 3	White	6'	6'	72'
1 1/2 x 1 1/2	Grey	6'	6'	72'
1 1/2 x 2	Grey	6'	6'	72'
1 1/2 x 2	White	6'	6'	72'
1 1/2 x 3	Grey	6'	6'	72'
1 1/2 x 4	Grey	6'	6'	72'
1 3/4 x 1 3/4	Grey	6'	6'	72'
2 x 2	Grey	6'	6'	72'
2 x 2	White	6'	6'	72'
2 x 3	Grey	6'	6'	72'
2 x 3	White	6'	6'	72'
2 x 4	Grey	6'	6'	72'
3 x 2	Grey	6'	6'	72'
3 x 2	White	6'	6'	72'
3 x 3	Grey	6'	6'	72'
3 x 4	Grey	6'	6'	72'
4 x 2	White	6'	6'	72'
4 x 3	Grey	6'	6'	72'
4 x 4	Grey	6'	6'	72'