

TORKALERT™

Mechanical & Strobe Horns

STROBE HORNS - See Fig. 1

APPLICATIONS

- High performance for industrial signaling applications. Offers high sound output, low current draw and dependable operation.
- Strobes use xenon flashtube, ideal for maximum efficiency and reliability.
- **Note:** TA880-N5 For outdoor use, unit must be mounted in a TA-WBBF outdoor backbox. TA5508H-G1 for indoor mounting only.

FEATURES

- **Alarm:** Penetrating mechanical sound.
- **Wiring:** Low current draw. Horn may be wired separately
- **Mounting:** 4" square surface mounting.


MECHANICAL HORNS - See Fig. 2-4

APPLICATIONS

- Loud tone with typical decibel output of 87dB at 10 feet. Low frequency resonance for strong penetration of noisy areas like boiler rooms, water pumping stations, elevators and air compressor rooms.
- **Note:** Use TORK® signal timers for 24 hour or 7 day scheduling, see page 358.

FEATURES

- **Input Voltage:** Wide input voltage ratings for compatibility with unregulated power supplies.
- **Wiring:** Screw terminals for convenient IN/OUT wiring. Low current draw for minimizing power supply and wiring cost.
- **Housing:** Steel, painted Dawn Mist. Resonant grill design for high sound output.
- **Mounting:** To indoor box TA-BBSF or outdoor box TA-WBBF, see accessories page 453.

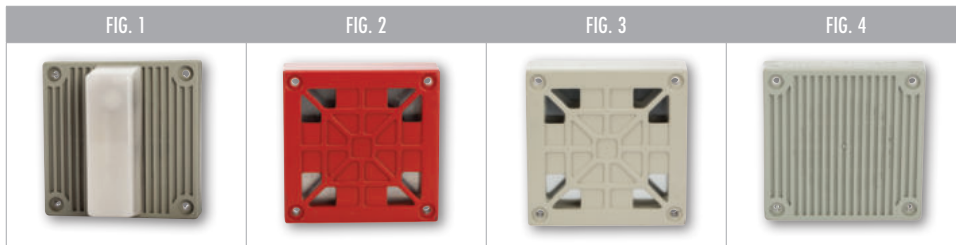

CAT. NO.	FIG. NO.	CERTIFICATION	UPC CODE	INPUT VOLTAGE	INPUT CURRENT (AMPS)	dB @10 FEET	CANDELA
TA880-N5	1	cULus	96015	120VAC	0.115	96	15
TA874-N5R (Red)	2	UL	97613	120VAC, 60Hz	0.070	87	—
TA874-N5	3	UL	96023	120VAC, 60Hz	0.070	87	—
TA875-G1	4	UL	97687	24VDC	0.035	—	—
WITH WEATHERPROOF BACKBOX TA-WBBF UL LISTED FOR OUTDOOR USE							
TA876-N5	3	UL	96026	120VAC, 60Hz	0.070	87	—