

TORKALERT™


Multi-Tone Electronic Horns

APPLICATIONS

- For indoor and outdoor use. Superior sound penetration for various room conditions. Screw terminals accept #12AWG.

FEATURES

- **Operating Temperature: TA-MTS:** -31°F to +150°F (-35°C to +66°C).
- **Dimensions And Mounting:**
 - TA-MTS: 4 1/8"H x 4 1/8"W x 3 17/32"D Can be mounted on ceiling or wall.
 - TA875-1G1: 4 3/4"H x 4 3/4"W x 1 3/8"D 1 gang, 2 gang or 4" square backbox.

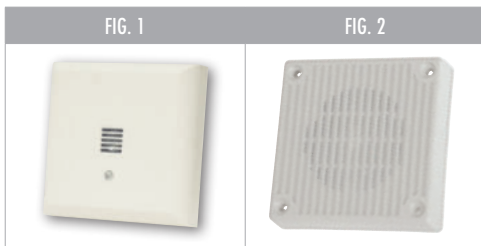

CAT. NO.	FIG. NO.	CERTIFICATION	UPC CODE	INPUT VOLTAGE	DESCRIPTION
TA875-1G1	1	cULus	97641	20-31VDC	Multi-tone Electric Horn
TA-MTS	2	UL	97674	115 VAC	Multi-tone Electric Horn

TA875-1G1 24VDC HORN		
ALARM TONE	CURRENT (AMPS)	TYPICAL dB @10 FEET
BELL	0.020	91
HI-LO	0.025	96
CHIME	0.028	93
SINGLE STROKE BELL	0.026	93
HORN	0.023	97
3 BEEPS, PAUSE	0.023	97
SIREN	0.040	95
SLOW WHOOP	0.040	96

TA-MTS 115VAC HORN				
ALARM TONE	AMPS @ 120VAC		TYPICAL dB @10 FEET	
	HIGH	STANDARD	HIGH OUTPUT	STD. OUTPUT
HORN	0.050	0.042	85	82
BELL	0.041	0.039	82	75
HORN 2	0.050	0.040	85	79
CODE 3 HORN	0.050	0.042	82	75
CODE 3 TONE	0.042	0.040	79	75
SLOW WHOOP	0.050	0.042	85	82
SIREN	0.045	0.041	85	82
HI-LO	0.042	0.039	82	79