

CONNECTORS

Mechanical Connectors

Aluminum, Dual Rated, Transformer Lugs

T, L Series




SPECIFICATIONS

- Meets or exceeds ANSI C119.4 Class A . AL9CU
- Temperature Rating: 90 °C. AL9CU.
- Voltage: 600V max.

FEATURES

- Versatile and reusable set-screw connectors made from high strength 6061-T6 aluminum alloy for superior electrical and mechanical performance.
- Two set-screws per wire hole ensure an exceptional connection.
- Electro-tin plated for low contact resistance.
- For use with copper or aluminum conductors.
- Mounting hole spacing is NEMA 1 3/4".

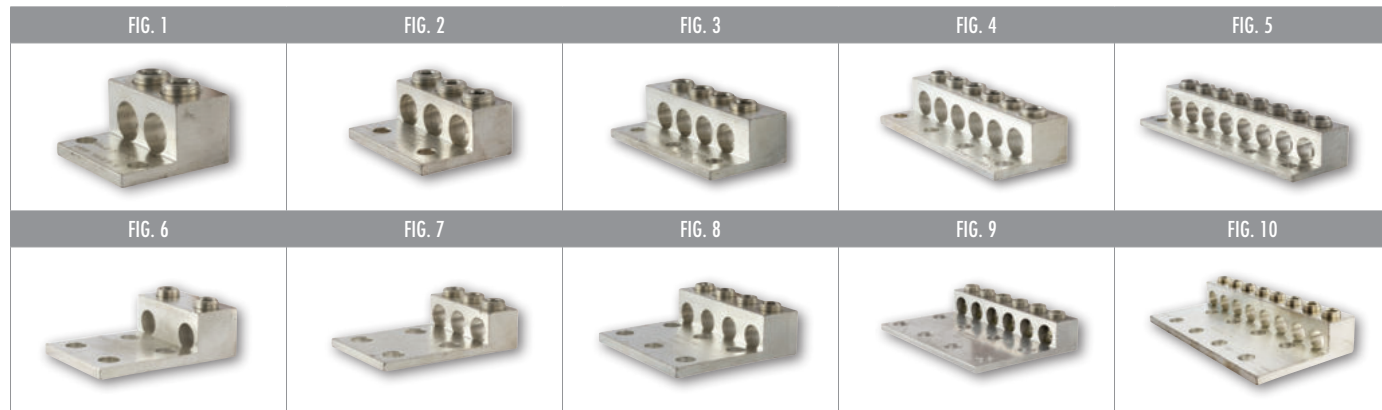

| CAT. NO. | FIG. NO. | WIRE RANGE | MAX TORQUE VALUE (IN./LBS.) | NO. OF CONDUCTORS | NO. OF MTG. HOLES (IN.) | MTG. HOLE DIA. (IN.) | MTG. HOLE SPACING (IN.) | HEX WRENCH SIZE (IN.) | MTG. BOLT SIZE (IN.) | LENGTH (L) (IN.) | WIDTH (W) (IN.) | HEIGHT (H) (IN.) | STD. PKG. QTY. |
|----------|----------|---------------|-----------------------------|-------------------|-------------------------|----------------------|-------------------------|-----------------------|----------------------|------------------|-----------------|------------------|----------------|
| 2-350T2 | 1 | 350 MCM-6 AWG | 400 | 2 | 2 | 0.375 | 1.750 | 3/8" | 5/16" | 2.250 | 1.940 | 1.250 | 1 |
| 3-350T2 | 2 | 350 MCM-6 AWG | 400 | 3 | 2 | 0.375 | 1.750 | 3/8" | 5/16" | 2.250 | 2.840 | 1.250 | 1 |
| 4-350T3 | 3 | 350 MCM-6 AWG | 400 | 4 | 3 | 0.375 | 1.750 | 3/8" | 5/16" | 2.250 | 3.750 | 1.250 | 1 |
| 6-350T4 | 4 | 350 MCM-6 AWG | 400 | 6 | 4 | 0.375 | 1.750 | 3/8" | 5/16" | 2.250 | 4.660 | 1.250 | 1 |
| 8-350T4 | 5 | 350 MCM-6 AWG | 400 | 8 | 4 | 0.375 | 1.750 | 3/8" | 5/16" | 2.250 | 5.560 | 1.250 | 1 |
| 2-350L4 | 6 | 350 MCM-6 AWG | 400 | 2 | 4 | 0.563 | 1.750 | 3/8" | 1/2" | 4.310 | 2.000 | 1.380 | 1 |
| 3-350L4 | 7 | 350 MCM-6 AWG | 400 | 3 | 4 | 0.563 | 1.750 | 3/8" | 1/2" | 4.310 | 2.940 | 1.380 | 1 |
| 4-350L6 | 8 | 350 MCM-6 AWG | 400 | 4 | 6 | 0.563 | 1.750 | 3/8" | 1/2" | 4.310 | 3.870 | 1.380 | 1 |
| 6-350L8 | 9 | 350 MCM-6 AWG | 400 | 6 | 8 | 0.563 | 1.750 | 3/8" | 1/2" | 4.310 | 5.750 | 1.380 | 1 |
| 8-350L8 | 10 | 350 MCM-6 AWG | 400 | 8 | 8 | 0.563 | 1.750 | 3/8" | 1/2" | 4.310 | 7.620 | 1.380 | 1 |
| 2-600L4 | 6 | 600 MCM-2 AWG | 550 | 2 | 4 | 0.563 | 1.750 | 3/8" | 1/2" | 4.500 | 2.410 | 1.630 | 1 |
| 3-600L4 | 7 | 600 MCM-2 AWG | 550 | 3 | 4 | 0.563 | 1.750 | 3/8" | 1/2" | 4.500 | 3.590 | 1.630 | 1 |
| 4-600L6 | 8 | 600 MCM-2 AWG | 550 | 4 | 6 | 0.563 | 1.750 | 3/8" | 1/2" | 4.500 | 4.780 | 1.630 | 1 |
| 6-600L8 | 9 | 600 MCM-2 AWG | 550 | 6 | 8 | 0.563 | 1.750 | 3/8" | 1/2" | 4.500 | 7.160 | 1.630 | 1 |

CONNECTORS