

# CONNECTORS

## Mechanical Connectors

### Aluminum, Dual Rated, Parallel Groove Clamps

PAA, PAE Series




#### SPECIFICATIONS

- Temperature Rating: 90 °C.
- Voltage: 600V max.

#### FEATURES

- High strength aluminum extruded alloy fittings assembled with steel or anodized high strength aluminum flat washers for heavy duty service entrance or for use as heavy duty distribution armor rod clamps.
- Serrated grooves provide increased contact. Supplied pre-filled with oxide inhibitor.
- For galvanized steel hardware, add the suffix -SH to each part number.

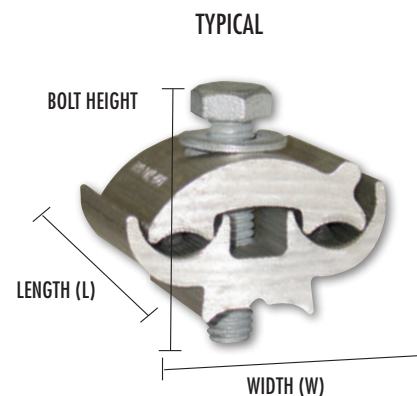

CAT. NO.	FIG. NO.	MAIN/RUN		TAP		HEX WRENCH SIZE	BOLT HEIGHT	WIDTH (W)	LENGTH (L)	STD. CTN. QTY.
		ACSR	AL/CU	ACSR	AL/CU					
PAA4	1	1/0-6	1/0 STR-6 SOL	1/0-6	1/0 STR-6 SOL	3/8	1.187	1.500	2.219	25
PAA5	1	1/0-8	1/0 STR-8 SOL	1/0-8	1/0 STR-8 SOL	3/8	1.496	1.496	1.240	25
PAA6	1	1/0-8	2/0 STR-8 SOL	1/0-8	2/0 STR-8 SOL	3/8	1.496	1.496	1.240	25
PAA10	1	336.4-1/0	400-1/0 SOL	1/0-8	1/0 STR-8 SOL	3/8	2.000	1.750	2.469	12
PAA12	1	4/0-2	4/0 STR-2 SOL	4/0-2	4/0 STR-2 SOL	1/2	2.000	2.000	2.250	12
PAA29	1	2-6	2 STR-6 SOL	2-6	2 STR-6 SOL	5/16	1.094	1.375	1.813	25
PAA129	1	4/0-2	4/0 STR-2 SOL	4/0-2	4/0 STR-20L	1/2	2.250	2.000	2.000	12
PAE2121-9	2	2/0-6	2/0 STR-6 SOL	2/0-6	2/0 STR-6 SOL	3/8	2.000	1.625	1.375	25
PAE4141-9	2	4/0-4	4/0 STR-2 SOL	4/0-4	4/0 STR-2 SOL	3/8	2.000	2.000	1.375	12