

CONNECTORS

Compression Connectors

Dual Rated Meter Socket Lugs

CAL Series




SPECIFICATIONS

- Voltage: 600V max.

FEATURES

- Made of dead-soft EC grade aluminum.
- 840 common dies – one die installs on all sizes. For aluminum or copper conductors.
- Pre-filled with oxide inhibitor.
- Installing dies (color red): .840, 18, 324, TX, 76, 11A, 249.

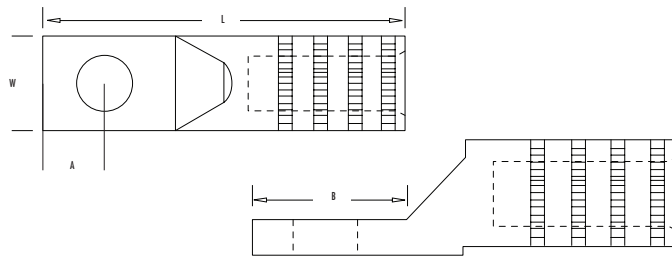

CAT. NO.	CONDUCTOR			BOLT SIZE (IN.)	LENGTH (L) (IN.)	WIDTH (W) (IN.)	TANG LENGTH (B) (IN.)	STD. CTN. QTY.
	STRANDED	SOLID	COMPACT					
CAL4	4	3	4	3/8	3.250	0.904	1.3125	12
CAL2	2	1	2	3/8	3.250	0.904	1.3125	12
CAL1-48	1	1/0	1	1/2	3.250	0.904	1.3125	12
CAL10	1/0	2/0	1/0	3/8	3.250	0.904	1.3125	12
CAL20	2/0	3/0	2/0	3/8	3.250	0.904	1.3125	12
CAL20-48	2/0	3/0	2/0	1/2	3.250	0.904	1.3125	12
CAL30-48	3/0	4/0	3/0	1/2	3.250	0.904	1.3125	12
CAL40	4/0	–	4/0	3/8	3.250	0.904	1.3125	12
CAL40-48	4/0	–	4/0	1/2	3.250	0.904	1.3125	12