




## Easy-Twist™ Wire Connectors Pails    UL486C Listed



- \*Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation
- \*Temperature rating 105 C (221 F)
- \*Fixed, precise square wire spring provides secure gripping of conductors
- \*Deep skirt entry provides protection from flashover and shorts
- \*Sure-grip ribs improve gripping ability and comfort
- \*Compact design ensures proper installation - especially in tight spaces
- \*Threaded funnel entry guides the wires into the connector easily
- \*Pre-twisting of wires is not necessary
- \*1,000 voly maximum in fixtures and signs

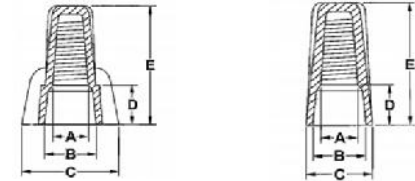

Drawn - SD

Approved - KM

Title - Easy-Twist™ Wire Connectors



| Catalog Number | Figure | Wire Range | Color  | Contents / Qty per Pail | E     | A    | B    | C    | D    | Temp Rating | Max Voltage                      | Standard Package Qty |
|----------------|--------|------------|--------|-------------------------|-------|------|------|------|------|-------------|----------------------------------|----------------------|
| ET-CP-12       | 1      | 22-14 AWG  | Orange | WC-O 65                 | .866  | .197 | .382 | .500 | .268 | 105 C       | 300 V                            | 1                    |
|                |        | 22-10 AWG  | Yellow | WC-Y 45                 | .969  | .236 | .433 | .551 | .268 |             |                                  |                      |
|                |        | 22-10 AWG  | Red    | WC-R 30                 | 1.043 | .339 | .516 | .642 | .406 |             |                                  |                      |
|                |        | 22-8 AWG   | Tan    | WWC-T 40                | 1.142 | .283 | .457 | .720 | .362 |             |                                  |                      |
| ET-CP-13       | 1      | 22-14 AWG  | Orange | WC-O 60                 | .866  | .197 | .382 | .500 | .268 | 105 C       | 300 V                            | 1                    |
|                |        | 22-8 AWG   | Tan    | WWC-T 45                | 1.142 | .283 | .457 | .720 | .362 |             |                                  |                      |
|                |        | 18-10 AWG  | Yellow | WWC-Y 50                | 1.016 | .252 | .386 | .717 | .354 |             |                                  |                      |
|                |        | 18-8 AWG   | Red    | WWC-R 30                | 1.252 | .354 | .512 | .906 | .378 |             |                                  |                      |
| ET-CP-14       | 1      | 22-14 AWG  | Orange | WC-O 65                 | .866  | .197 | .382 | .500 | .268 | 105 C       | 600 V<br>600 V<br>600 V<br>300 V | 1                    |
|                |        | 22-10 AWG  | Yellow | WC-Y 45                 | .969  | .236 | .433 | .551 | .268 |             |                                  |                      |
|                |        | 22-10 AWG  | Red    | WC-R 30                 | 1.043 | .339 | .516 | .642 | .406 |             |                                  |                      |
|                |        | 22-14 AWG  | Blue   | WC-B 100                | .697  | .161 | .280 | .390 | .217 |             |                                  |                      |
| ET-CP-15       | 1      | 22-14 AWG  | Grey   | WC-G 120                | .598  | .150 | .256 | .339 | .217 | 105 C       | 300 V<br>300 V<br>600 V<br>600 V | 1                    |
|                |        | 22-14 AWG  | Blue   | WC-B 100                | .697  | .161 | .280 | .390 | .217 |             |                                  |                      |
|                |        | 22-14 AWG  | Orange | WC-O 65                 | .866  | .197 | .382 | .500 | .268 |             |                                  |                      |
|                |        | 22-10 AWG  | Yellow | WC-Y 45                 | .969  | .236 | .433 | .551 | .268 |             |                                  |                      |