


## Heavy Wall Heat Shrink



Drawn - SD / Approved - KM

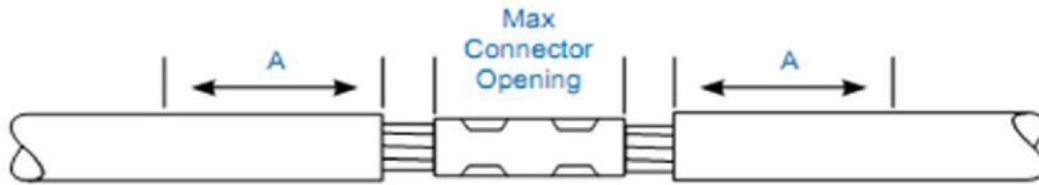

Part Number	Cable Splice Range	Max Connector OD	General Use Range		Length (Inches)	Minimum Seal Length Per Side "A"
			Maximum	Minimum		
HWHS 300-6	14 - 6 AWG	0.29	0.39	0.13	6	1.5"
HWHS 300-12	14 - 6 AWG	0.29	0.39	0.13	12	1.5"
HWHS 300-48	14 - 6 AWG	0.29	0.39	0.13	48	1.5"
HWHS 400-6	8 - 2 AWG	0.41	0.55	0.17	6	2"
HWHS 400-12	8 - 2 AWG	0.41	0.55	0.17	12	2"
HWHS 400-48	8 - 2 AWG	0.41	0.55	0.17	48	2"
HWHS 750-4	6 - 4/0 AWG	0.69	0.86	0.25	4	2"
HWHS 750-6	6 - 4/0 AWG	0.69	0.86	0.25	6	2"
HWHS 750-9	6 - 4/0 AWG	0.69	0.86	0.25	9	2"
HWHS 750-12	6 - 4/0 AWG	0.69	0.86	0.25	12	2"
HWHS 750-48	6 - 4/0 AWG	0.69	0.86	0.25	48	2"
HWHS 110-4	2 AWG - 500 MCM	1.06	1.22	0.35	4	2"
HWHS 110-6	2 AWG - 500 MCM	1.06	1.22	0.35	6	2"
HWHS 110-8	2 AWG - 500 MCM	1.06	1.22	0.35	8	2"
HWHS 110-9	2 AWG - 500 MCM	1.06	1.22	0.35	9	2"
HWHS 110-12	2 AWG - 500 MCM	1.06	1.22	0.35	12	2"
HWHS 110-48	2 AWG - 500 MCM	1.06	1.22	0.35	48	2"
HWHS 150-6	2/0 AWG - 750 MCM	1.3	1.73	0.51	6	2"
HWHS 150-9	2/0 AWG - 750 MCM	1.3	1.73	0.51	9	2"
HWHS 150-12	2/0 AWG - 750 MCM	1.3	1.73	0.51	12	2"
HWHS 150-48	2/0 AWG - 750 MCM	1.3	1.73	0.51	48	2"
HWHS 200-6	250 - 1000 MCM	1.5	1.96	0.70	6	2"
HWHS 200-9	250 - 1000 MCM	1.5	1.96	0.70	9	2"
HWHS 200-12	250 - 1000 MCM	1.5	1.96	0.70	12	2"
HWHS 200-48	250 - 1000 MCM	1.5	1.96	0.70	48	2"
HWHS 268-9	500 - 1500 MCM	1.84	2.48	0.86	9	2.5"
HWHS 268-12	500 - 1500 MCM	1.84	2.48	0.86	12	2.5"
HWHS 268-48	500 - 1500 MCM	1.84	2.48	0.86	48	2.5"
HWHS 370-12	1250 - 2000 MCM	-	3.93	1.29	12	2.5"
HWHS 370-48	1250 - 2000 MCM	-	3.93	1.29	48	2.5"
HWHS 420-12	1500 - 2500 MCM	-	4.64	1.49	12	2.5"
HWHS 420-48	1500 - 2500 MCM	-	4.64	1.49	48	2.5"