




REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)

REMOVABLE CAP
FOR DUAL ENTRY
(INSERT IN OTHER SIDE)



IPLD250-5 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPLD250-3	3	2.93
IPLD250-4	4	3.80
IPLD250-5	5	4.66
IPLD250-6	6	5.52
IPLD250-7	7	6.38
IPLD250-8	8	7.24
IPLD250-10	10	8.97

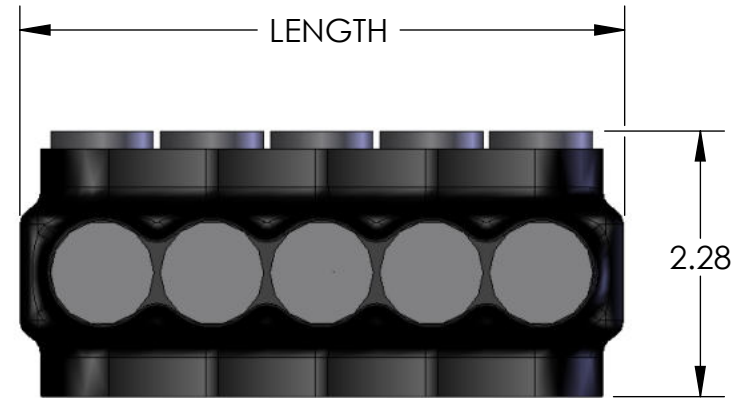

5/16 INTERNAL HEX PRESSURE SCREW



WIRE ENTRY POINT
WIRE RANGE: 250 - #6AWG
PRE-FILLED W/ OXIDE INHIBITOR

CONTACT NSI FOR SALES @ 800.321.5847

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.

		POLARIS SALES CO. INC	
<small>PROPRIETARY AND CONFIDENTIAL</small>		<small>11625 PROSPEROUS DRIVE ODESSA, FL 33556</small>	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.</small>		TITLE: INSULATED DUAL ENTRY 250 CONNECTOR	
<small>DRAWN BY</small> S.PARRY	<small>NAME</small> S.PARRY	<small>DATE</small> 6/2012	DWG. NO. IPLD250-
MATERIAL: N/A		SCALE: N/A	SHEET: 1 OF 1