


1.55

REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN
COMPLETE)

INSULATED MOUNTING PORT ON EACH END
FOR 1/4 BOLT

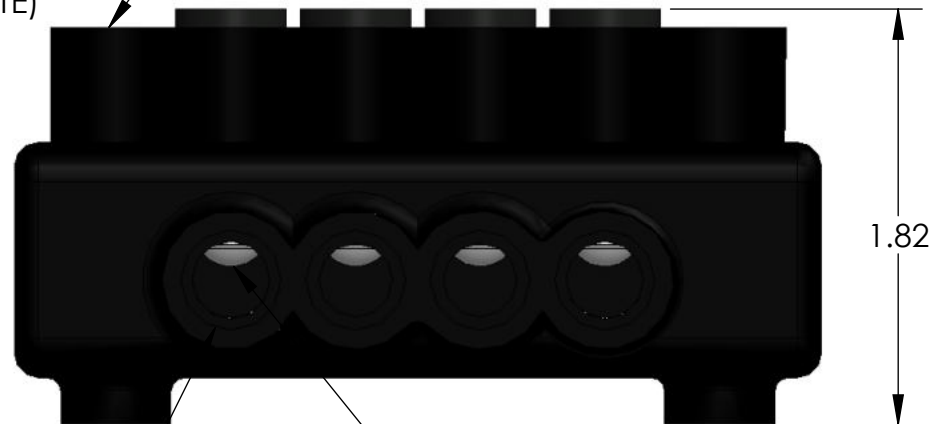

1.82

WIRE ENTRY POINT
WIRE RANGE: 1/0 - #14 AWG
PRE-FILLED W/ OXIDE INHIBITOR

3/16 INTERNAL HEX
PRESSURE SCREWS

CONTACT NSI FOR SALES @ 800.321.5847

IPLM1/0-4 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPLM1/0-3	3	3.46
IPLM1/0-4	4	4.11
IPLM1/0-5	5	4.76
IPLM1/0-6	6	5.41
IPLM1/0-7	7	5.81
IPLM1/0-8	8	6.71
IPLM1/0-10	10	8.01
IPLM1/0-12	12	9.06

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.

		POLARIS SALES CO. INC					
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556					
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: INSULATED MOUNTED 1/0 CONNECTOR					
<table border="1"> <thead> <tr> <th>NAME</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>S.PARRY</td> <td>06/2012</td> </tr> </tbody> </table>		NAME	DATE	S.PARRY	06/2012	DWG. NO. IPLM1/0-	
NAME	DATE						
S.PARRY	06/2012						
MATERIAL: N/A		SCALE: N/A	SHEET: 1 OF 1				