



REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)

5/16" INTERNAL HEX
PRESSURE SCREW



WIRE ENTRY POINT
WIRE RANGE: 600 KCMIL - #6 AWG
PRE-FILLED W/ OXIDE INHIBITOR

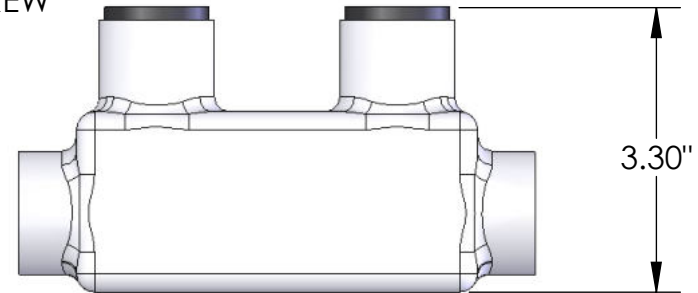

NOTES:

1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
3. DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
4. COLD TEMPERATURE RATED TO -45°C.
5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT
6. UV RATED



POLARIS
SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: INSULATED 600 SPLICE CONNECTOR	
NAME	DATE	DWG. NO. ISR600	
DRAWN BY L. HILL	07-23-10		
MATERIAL: N/A		SCALE: N/A	SHEET: 1 OF 1