

# TORK<sup>®</sup>

## DIGITAL TIME SWITCH

**DTS200B**  
**DZS200BP**

CEC US

MEETS CALIFORNIA  
ENERGY COMMISSION'S  
TITLE 24 REQUIREMENTS

### SPECIFICATIONS

Input Voltage: 120/(208-240)/277 VAC, 50/60 Hz, 5VA max.  
Dry Contact Ratings: SPDT (unpowered)

### CONTACT RATINGS

TYPE	VOLTAGE	Rating	
		NO	NC
Ballast	120VAC	30A	10A
	277VAC	20A	10A
Tungsten	120VAC	15A	2A
General Purpose	24-277VAC	30A	30A
Pilot Duty	120-277VAC	720VA	720VA
Motor Load	120VAC	1HP	1HP
	208-240VAC	2HP	2HP
	277VAC	2HP	2HP
Resistive	28VDC	30A	30A


### WIRING INSTRUCTIONS & DIAGRAM

Use copper wire only. AWG #14-16 for line input and AWG #12-16 for load outputs.

**WIRING TO COMPLY WITH ALL LOCAL AND NATIONAL ELECTRICAL CODES.**

Bonding between conduit connection is not automatic and must be provided as part of the installation.

**THE ENCLOSURE MUST BE PROPERLY GROUNDED.**

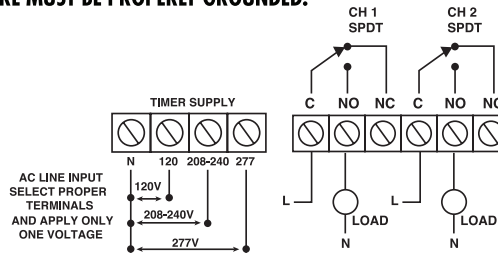

### ! CAUTION !

#### RISK OF ELECTRIC SHOCK

More than one disconnect switch may be required to de-energize the equipment before servicing. Disconnect power at main panel prior to installing or servicing this lighting control or the equipment connected to it.

**REPLACE INSULATOR AFTER WIRING.**

L1-719(B)

NSI INDUSTRIES, LLC • 888.500.4598 • www.nsiindustries.com

A DIVISION OF **NSI** NSI INDUSTRIES, LLC

## NSi Industries, LLC

TORK PRODUCT LABEL

p/n **DTS200B**

p/n **DZS200BP**

(L1-719(B))

3.875 x 7.25

1C/0

