
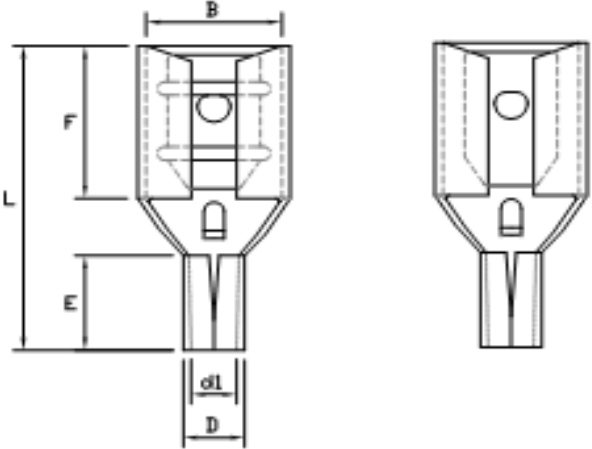


## Uninsulated Female Disconnects

<p>Drawn - SD</p> <p>Approved - KM</p> <p>Material - Brass</p> <p>Title - Uninsulated Female Disconnects</p> 								
Part Number	Wire Range	Electrical Rating Max	B	F	L	E	d1	D
F22-110-2	22-18 AWG	105C / 600V	0.1500	0.2570	0.5500	0.2000	0.0720	0.1030
F22-110-3	22-18 AWG	105C / 600V	0.1500	0.2570	0.5540	0.2000	0.0720	0.1030
F22-187-2	22-18 AWG	105C / 600V	0.2330	0.2530	0.5650	0.2050	0.0640	0.1030
F22-187-3	22-18 AWG	105C / 600V	0.2330	0.2530	0.5650	0.2050	0.0640	0.1030
F22-250-3	22-18 AWG	105C / 600V	0.2598	0.3110	0.6299	0.1968	0.0669	0.1062
F16-110-2	16-14 AWG	105C / 600V	0.1490	0.2500	0.5570	0.2090	0.0900	0.1180
F16-110-3	16-14 AWG	105C / 600V	0.1259	0.2519	0.5314	0.1968	0.0905	0.1299
F16-187-2	16-14 AWG	105C / 600V	0.2330	0.2540	0.5560	0.2060	0.0900	0.1290
F16-187-3	16-14 AWG	105C / 600V	0.2330	0.2550	0.5590	0.2060	0.0900	0.1290
F16-250-3	16-14 AWG	105C / 600V	0.2598	0.3110	0.6299	0.1968	0.0905	0.1299
F12-250-3	12-10 AWG	105C / 600V	0.2598	0.3110	0.6692	0.2362	0.1338	0.1771