### **1-LIGHT MULTI COMBO LED**





#### 24550-017 - 13W LED

1 x 13 WATT
BRIDGELUX LED
930 (Im) - Lumens
3000K - Kelvins
50,000 (Hrs) LED Life
85+ - CRI
20° Light Beam Angle
30° Horizontal Adjustment
6 5/8" x 6 5/8" Cut Hole Size
Dimmable LED Driver Included
White Finish
120V Input

### 24549-011 - 24W LED

1 x 24 WA	ΛTT
-----------	-----


BRIDGELUX LED
2000 (Im) - Lumens
3000K - Kelvins
50,000 (Hrs) LED Life
85+ - CRI
20° Light Beam Angle
30° Horizontal Adjustment
6 5/8" x 6 5/8" Cut Hole Size
Dimmable LED Driver Included
White Finish
120V Input

# ,60<sup>°</sup> ЗÓ


13W-LED

	h(m)	D(m)	E(lx)
60.		20^	
V	0.5	0.213	28575
$ \land$	1	0.426	7144
Ы	2	0.852	1786
30	3	1.278	793
-	4	1.704	446

## 24W-LED



+	h(m)	D(m)	E(I×)
⊁₀₀_]		20 ~	
$\searrow$	1	0.31	4726
$ \land$	2	0.62	1181
М	з	0.92	525.1
30	4	1.23	295.4
$\sim$	5	1.54	189

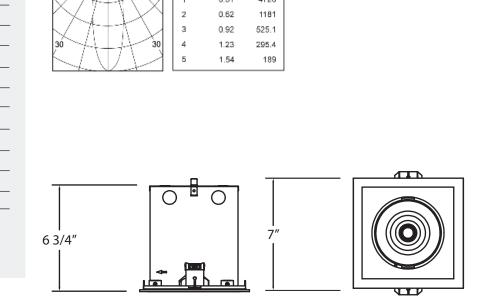

213