

Date:	Type:
Project Name:	Part Number:

DECO SERIES

LED WALL SCONCE WITH MICROWAVE SENSOR



REMOTE CONTROL



BUILD IN
MICROWAVE SENSOR


APPLICATIONS

- Residential
- Commercial Building
- Public Hallway


FEATURES

- Energy Star Listed
- No UV or IR radiation
- Mercury Free
- Elegant & Efficient Design
- 50,000 hours lifespan
- 5-year warranty
- Microwave Sensor
- CRI 80
- Factory setting Dim to 30% after 5 mins

SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	EFFICACY (lm/w)	WATTS	VOLTS	CCT	
R32009	RENO-WSP-MCCT-MW-MS	1500lm	75	20W	120VAC	27/30/35/40/50K	
R73004	RENO-REMOTE-M	REMOTE CONTROL FOR CEILING FIXTURE WITH SENSOR					

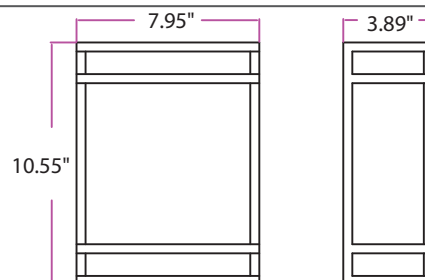







DIMENSIONS



Date:	Type:
Project Name:	Part Number:

REMOTE CONTROL INSTRUCTION

ORDER# R73004
MODEL# RENO-REMOTE-M

Button	Remarks
	Press the "ON/OFF" button, the light goes to constant on/off mode, sensor is disable. Short press the "M/R" button, the sensor starts to work.
	Short press "M/R" button, all parameters back to the last settings. Long press "M/R" button, all parameters back to factory settings.
	Stand-by dim level Set up stand-by dim level: 10%/ 30%
	Detection Area Set up detection area: 25%/ 50%/ 100%
	Short press "DIM+/DIM-" button to transmit dimming signal. The brightness of the lamp adjust at 5% per unit, from 50% to 100%.
	Stand-by period Set up stand-up time: 0s/ 1min/ 30min/ +∞
	Daylight sensor Set up daylight threshold: 5lux/ 15lux/ 50lux/ disable
	Hold time Set up hold time: 5s/ 1min/ 5min/ 10min