

DESCRIPTION

SHB Series Linear LED High Bay is an excellent industrial and architectural light source. This High Bay is an extremely efficient LED luminaire replacing fluorescent systems in the retail and industrial applications. The SHB High Bay accommodates an integrated louver, high transparency Frame / Lens and Wire Guard.

SPECIFICATION FEATURES

Construction

Die formed 22 gauge galvanized steel painted high gloss white finish and is available in 4 ft and 8 ft sizes

Finish

22 gauge galvanized steel and high gloss enamel paint finish ensures maximum bonding and rust inhibition

Controls

The SHB LED High Bay is powered by Ultrasave Drivers

Shielding

Optional LED Frosted Frame / Lens / Wire Guard are available

Electrical

Long life LED system complete with electrical driver to deliver the optimal performance. LED's available in a 3500K, 4000K and 5000K with a typical CRI: 80. Rated for 94,000 hours. Electronic Drivers are available in 120/277 and 347 Volt applications

Compliance

Modules and Drivers are UL recognized components and indoor luminaires are cULus listed

Warranty

5 years


Driver and Module Access

Drivers can be accessed by removing the module plate




**LED
SHB HIGH BAY
LUMINAIRE**

powered by
ULTRASAVE

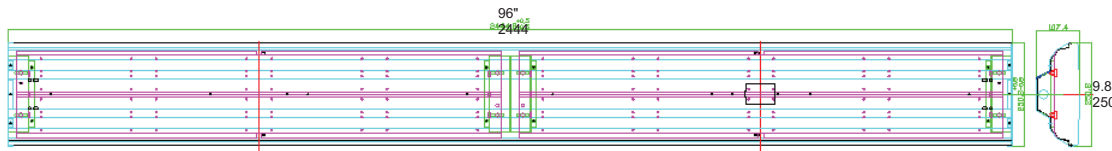



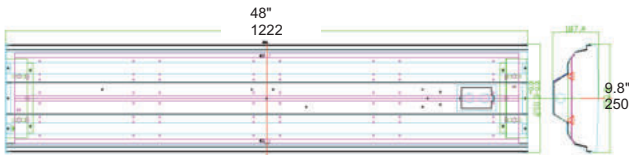

SHB8-32LED32 / SHB8-16LED16
Dimension
mm | 2444(L) x 250(W) x 107(D)
inch | 96"(L) x 9.8"(W) x 4.2"(D)



SHB4-16LED16 / SHB4-80LED08
Dimension
mm | 1222(L) x 250(W) x 107(D)
inch | 48"(L) x 9.8"(W) x 4.2"(D)

ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Status
	SHB8-32LED32 8ft	35200 35200	332 332	120M / 347 120M / 347	4000K 3500K / 5000K	106 99 / 110	Stock MTO
	SHB8-16LED16 8ft	17600 17600	166 166	120M / 347 120M / 347	4000K 3500K / 5000K	106 99 / 110	Stock MTO
	SHB4-16LED16 4ft	17600 17600	166 166	120M / 347 120M / 347	4000K 3500K / 5000K	106 99 / 110	Stock MTO
	SHB4-80LED08 4ft	8830 8830	83 83	120M / 347 120M / 347	4000K 3500K / 5000K	106 99 / 110	Stock MTO

OPTIONAL ACCESSORIES

SHB-L | SHB Louver 4ft
SHB-FLW | SHB Frame / Lens / Wire Guard 4ft

SHIPPING DATA

Model No.	Weight
SHB8-32LED32	9kg / 20lbs
SHB8-16LED16	9kg / 20lbs
SHB4-16LED16	4.5kg / 10lbs
SHB4-80LED08	4.5kg / 10lbs



Energy Efficient Lighting Company Limited
331 Amber Street, Unit B, Markham, ON L3R 3J7 Canada
Tel: 905-415-8878 • 1-855-415-8878 | Fax: 905-415-8872 • 1-855-415-8872
Email: marketing@eelighting.ca | URL: www.eelighting.ca

Specifications and dimensions subject to change without notice.
Consult your Energy Efficient Lighting Representative
for availability and ordering information.