


**JT**

- Only for Use in Approved Enclosed Halogen Fixtures
- Medium Screw Base - E26  
Mogul Screw Base - E39/E40
- Double Envelope
- 120 Volt (except as noted)
- Universal Burn Position


Watts	Ushio Ordering Code	Ushio Lamp Description	Dimensions mm			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Bulb Finish
			Dia (A)	MOL (B)	LCL (C)					
<b>Medium Screw Base – E26 Compact Version</b>										
100	1001137	JT120V-100WG	31.0	85.0	51.0	CC-8	1600	2800	1500	Clear
150	1001883	JT120V-150WG*	31.0	85.0	54.0	CC-8	2800	2800	2000	Clear
250	1001141	JT120V-250WG	31.0	105.0	58.0	CC-8	5000	2950	2000	Clear
250	1001142	JT120V-250WGF*	31.0	105.0	58.0	CC-8	4850	2950	2000	Frosted
<b>Mogul Screw Base – E39/E40</b>										
500	1001143	JT120V-500WB	40.0	193.0	123.0	C-8	11000	3200	2000	Clear
500	1003516	JT220V-500WC1/E40*	42.0	195.0	123.0	C-8	12500	3200	200	—
1000	1001134	JT120V-1000WB	42.0	260.0	157.0	C-8	22000	3050	2000	Clear
1000	1003361	JT120V-1000WC/E40	42.0	195.0	123.0	C-8	25000	3200	150	Clear
1000	1003517	JT220V-1000WC1/E40*	42.0	195.0	123.0	C-8	25000	3200	200	—
1000	1001889	JT240V-1000WB*	42.0	260.0	175.0	C-8	21500	3400	2000	Clear

\* Special Order Item

JT type Halogen lamps are double enveloped lamps in which a Halogen lamp serves as an inner tube.

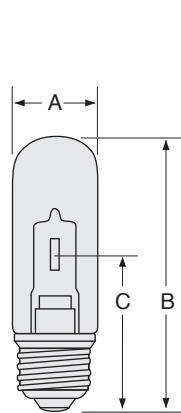

E26 - Clear or Frosted Compact Version

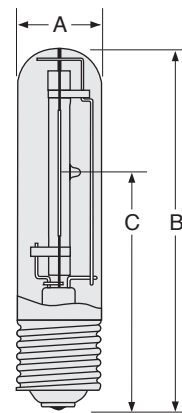

E39 and E40