

CANADALITE

Konka KK-T8 LED Tube

Konka T8 LED Tubes are an ideal energy saving choice for existing linear fluorescent fixtures.




Features:

- High Brightness SMD 5630 Generate 100LM/W
- Built-in Dirver or External Driver available
- Rotating End Cap gives you ideal directional lighting
- Milky PC cover or clear conver available
- No Color Patch
- CRI>70 or CRI>80 available
- Suitable for damp location
- Long life > 50,000 hours
- 150° Beam angle
- 120-277V wide voltage input
- DC 12-24V and 347V available
- Up to 5 years warranty



RoHS  us

Product Number	Watts	Volts	Initial Lumens	Base	CRI	Color Temp. (K)	Case Qty.	Rated Life	MOL (in.)	Beam Angle
KK-T8-2NW-08	8	120-277	800	G13	82	4100	40	50,000	24	150
KK-T8-2CW-08	8	120-277	800	G13	82	6000	40	50,000	24	150
KK-T8-3NW-12	12	120-277	1200	G13	82	4100	20	50,000	36	150
KK-T8-3CW-12	12	120-277	1200	G13	82	6000	20	50,000	36	150
KK-T8-4NW-18	18	120-277	1800	G13	82	4100	20	50,000	48	150
KK-T8-4CW-18	18	120-277	1800	G13	82	6000	20	50,000	48	150

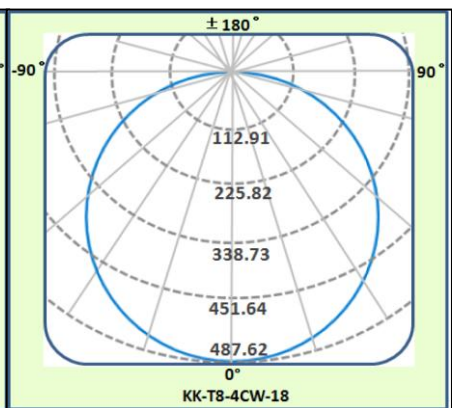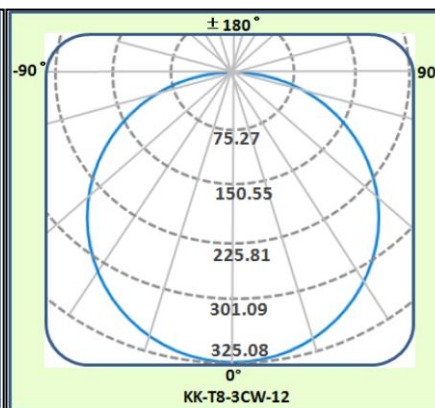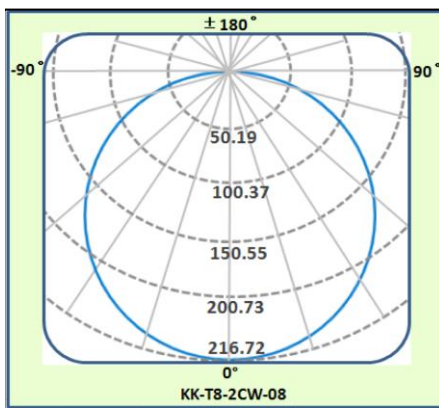

Warning:

Konka T8 LED Tube will not operate on shunted sockets. The socket must be non-shunted type only.
 Konka T8 LED Tube will not operate on the current installed ballast/driver. Please rewire according to the Konka installation guide.

Job Name: _____

Date: _____