



Description:

50 watt LED Grow Light with a full spectrum, emphasizing the Blue and Red wavelengths. Generally, this light can replace up to a 100 watt HPS lamp.

Several of the benefits of this lamp include:

- Light Spectrum is efficiently absorbed by plants
- Save money on maintenance and electricity
- UL listed for damp location
- Long lasting – 50,000 hour expected LED life
- Cool running so light can be mounted close to plants

The lamp is designed as a retrofit that can be installed in an E26 Medium base in an open or closed fixture. It accepts an input voltage of 120-277VAC.


Applications:

This lamp can be used as a primary or supplemental light source for almost any type of indoor growing.

The light output has a very wide angle. It will provide the greatest benefit when mounted relatively close to the plants.

Notes:

- When installing LED-8000 series retrofit lamps within HID fixtures, ballast must be bypassed when present.
- Installing surge/lightning protectors is highly recommended to eliminate premature failure caused by surges and other power fluctuations
- All specification information falls within a +/- 5% range and is subject to change without notice.
- Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.

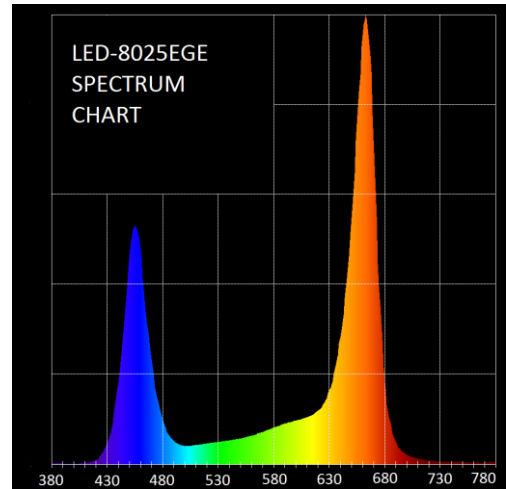

Technical Specifications	
Type	Retrofit
Mounting	E26 – Medium Base
Material	Aluminum / Polycarbonate
Input Voltage	120-277 VAC
Power Consumption	50 watts
Power Factor	> 99
PAR Output (Center)	
6 inches	423 $\mu\text{mol}/\text{m}^2/\text{s}$
12 inches	213 $\mu\text{mol}/\text{m}^2/\text{s}$
18 inches	78 $\mu\text{mol}/\text{m}^2/\text{s}$
24 inches	53 $\mu\text{mol}/\text{m}^2/\text{s}$
LED Colors	Red, White, Blue
Coverage area	up to 2' by 2'
Dimmable	No
Beam Angle	Wide
Rated LED Life	50,000 hours
Dimensions	
Height	5.91 inches
Diameter	7.87 inches
Mercury/Lead content	None
Warranty	5 year limited